
KIN H - CL01

Battery Powered Handle with Integrated Access Control

Secure. Wireless. Intelligent.
Built for the modern facility.

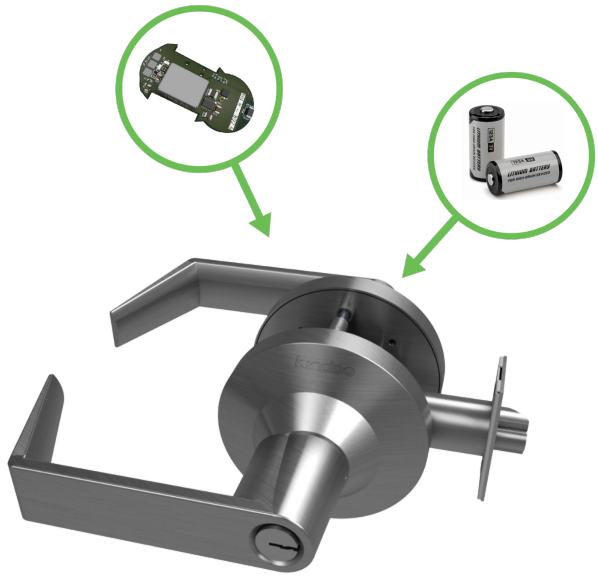

Full Access Control, No Trade-offs

- **Your Phone Is the Key:** Manual or automatic unlocking. No cards, fobs, PINs or readers.
- **Secure by Design:** 256-bit encrypted, time-based credentials, never stored in the lock.
- **Manage From Anywhere:** Users, schedules and audit trails, from phone app or PC.
- **No Infrastructure:** No servers, panels or internet. Unlimited sites and users.

Industrial Strength & Longevity

- **10-Year Battery Life:** Based on 10 unlockings per day using CR123 batteries.
- **Vandalism Resistant:** Full Stainless Steel construction with no exposed electronics.
- **Free-Wheeling Lever:** Prevents latch damage when locked.
- **Flexible Install:** Wire-free drop-in. Non-handed and field reversible.

Door Prep	Standard ANSI 161, 4⅞" (124 mm) strike, 2¾" (70 mm) & 2⅜" (60 mm) backset
Door Thickness	1¼" to 2" (32 mm to 51 mm)
Latch Throw	½" (13 mm)
Power	2× CR123 batteries (not included), in handle
Bluetooth® Range	Up to 30 ft (9 m) without obstacles, 2.4 GHz
Temperature Range	32°F to 120°F (0°C to 49°C)
Cylinder	Key in lever *(custom order: SFIC, LFIC)*
Finish	Brushed Stainless Steel *Custom orders:* Bright/Dull Chrome, Bright/Dull Brass, Dark Oil Rubbed Bronze
Certifications	Designed to meet ANSI Grade 1 and UL 10C standards (testing in progress)
Warranty	3 years

Simple licensing: 2 free users included. Add or transfer user seats anytime in the Kindoo app (iOS® and Android™), monthly or one-time. **Partners** share in user revenue, tracked live in an online portal.

US Patents: US11861960B1, US11859408B1, US12037813B1, US10325430B2 · © 2026 Kindoo. All Rights Reserved.