
KIN S - SM - W02

Wired Strike with Integrated Access Control

No cutting. No internet.
Just add power.

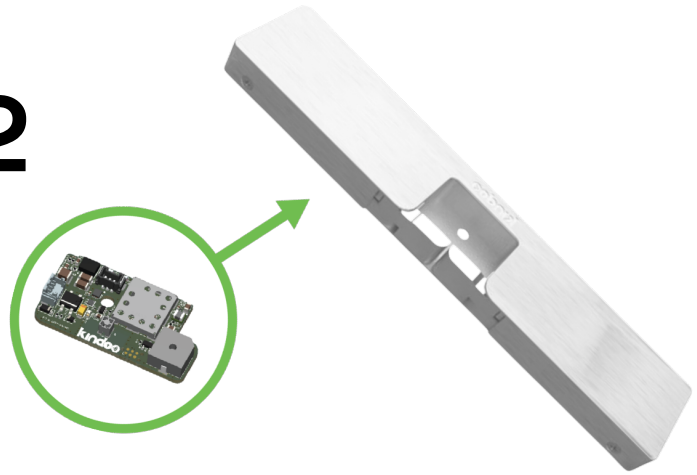

Full Access Control, No Trade-offs

- **Your Phone Is the Key:** Manual or automatic unlocking. No cards, fobs, PINs or readers.
- **Secure by Design:** 256-bit encrypted, time-based credentials, never stored in the lock.
- **Manage From Anywhere:** Users, schedules and audit trails, from phone app or PC.
- **No Infrastructure:** No servers, panels or internet. Unlimited sites and users.

Built for Any Frame

- **No Cutting Required:** Surface mounts on wood and metal frames. Non-handed.
- **Fail Safe or Fail Secure:** Available in both modes to suit the door.
- **Heavy-Duty:** Stainless Steel 304. 1,500 lbs (680 kg) static, 70 ft-lbs (95 J) dynamic.
- **Just Add Power:** Connects to a 12 V or 24 V DC supply. No external modules.

Frame & Latch	Wood and metal frames, up to ½" (13 mm) throw latchbolt
Function	Non-handed; fail safe or fail secure
Power	12 V or 24 V DC power supply
Bluetooth® Range	Up to 30 ft (9 m) without obstacles, 2.4 GHz
Temperature Range	32°F to 120°F (0°C to 49°C)
Dimensions	8⅞ × 1¾ × ½ in (225 × 44 × 13 mm), L × W × H; ⅛" (3 mm) spacer plate (optional)
Finish	Stainless Steel 304
Strength	Static 1,500 lbs (680 kg) · Dynamic 70 ft-lbs (95 J) · 250,000 cycles
Certifications	ANSI/BHMA A156.31, Grade 1 · RoHS compliant
Warranty	3 years

Simple licensing: 2 free users included. Add or transfer user seats anytime in the Kindoo app (iOS® and Android™), monthly or one-time. **Partners** share in user revenue, tracked live in an online portal.

US Patents: US11861960B1, US10325430B2, US12196005 · © 2026 Kindoo. All Rights Reserved.